

POMPE DIABLO







Features

- Hydraulic isolator separates priming water from pumping water for faster priming, more turbulent-free flow and increased efficiency.
- Dual-compartment motor for simplified field wiring.
- Union connectors included for connecting directly to 75 or 90 plumbing.
- Extra large, robust basket with smooth surface for easy debris removal.
- Easy-carry handle; easily removable ergonomic lock ring; and see-through lid for easy basket inspection.

TECHNICAL DATA

Model	HP	kW	V		A		P1(kW)		Q	L/min m³/h	0	150	250	250	450	500	550	650	750	1000
			1~	3~	1~	3~	1~	3~			0	9	15	21	27	30	33	39	45	60
PPA50-150	2	1.5	220	380	7.2	3.0	1.7	1.6	H(m)	19.8	18.6	16.5	13.2	9.05	6.5					
PPA50-300	3	2.2	220	380	12.5	2.7	2.5	2.5		24	23	21.5	19.5	16.4	14.5	12				
PPA50-400	4	3		380		6.4		3.5		26.8	25.8	25	23	20.5	19	17.2	13.1			
PPA50-400S	4	3		380		6.4		3.5		19.8	19.3	19.1	18.5	17.2	16.4	15.4	13.2	11.2	6.4	

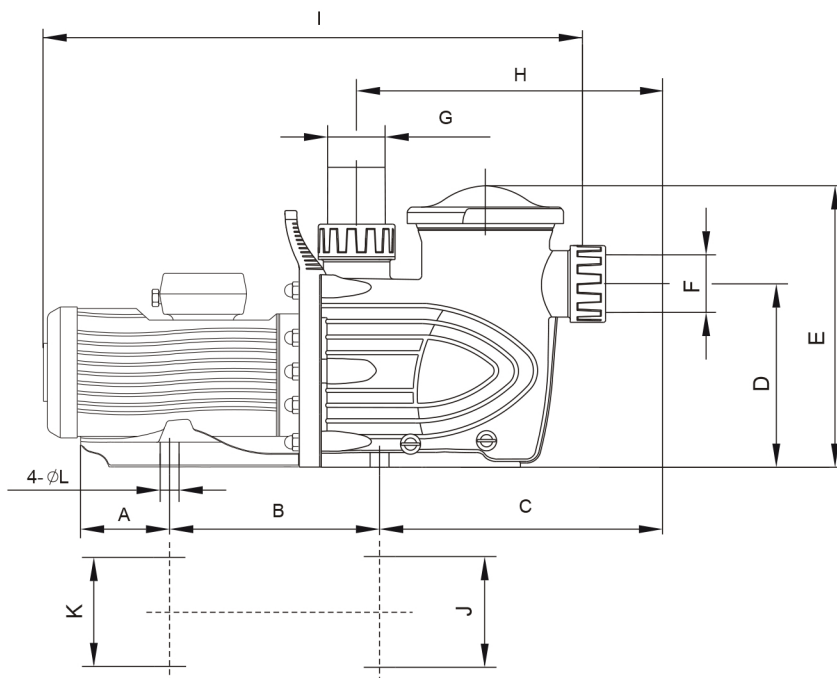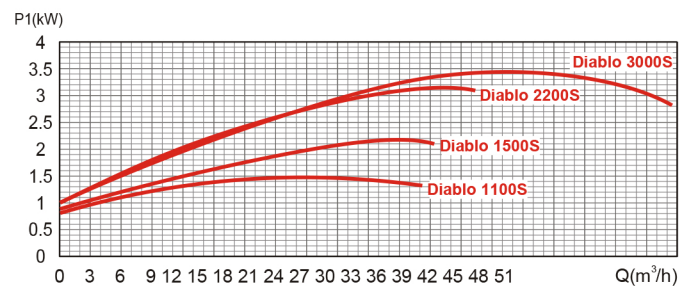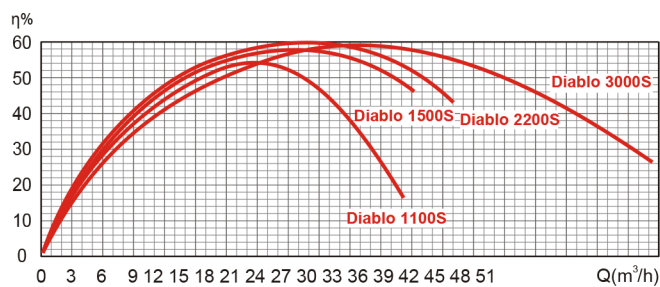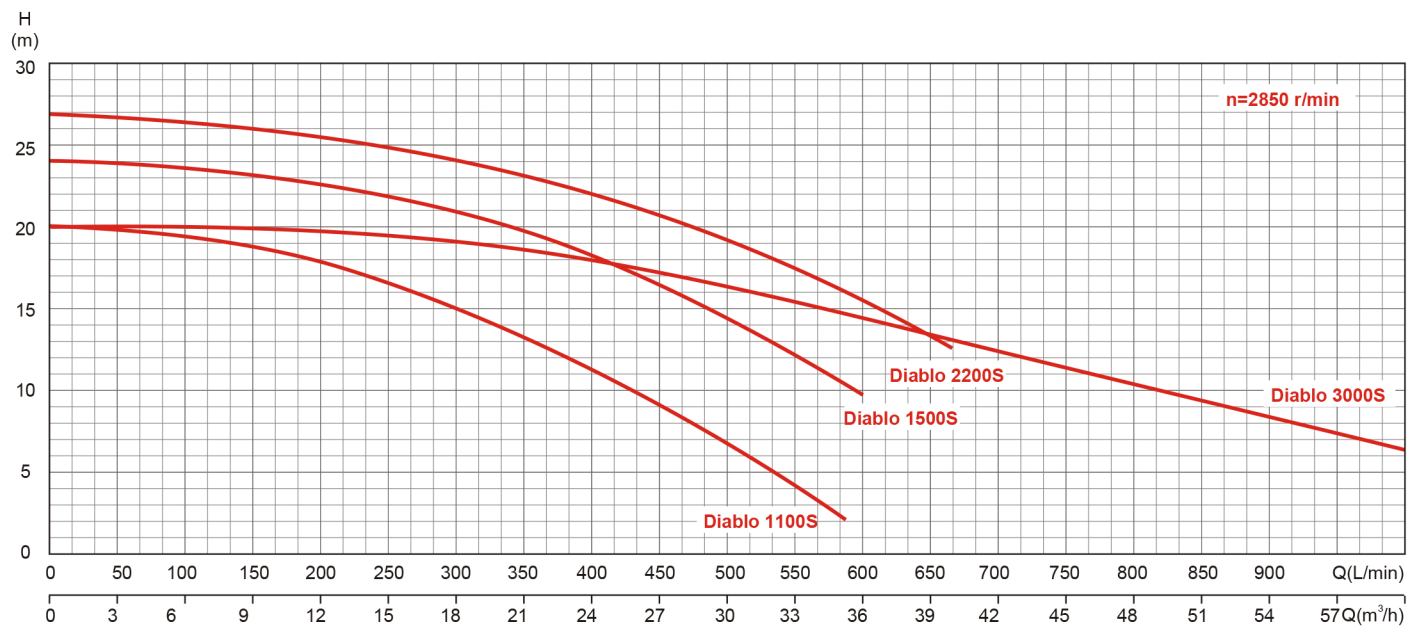

DIMENSIONAL

Model	A	B	C	D	E	F	G	H	I	J	K	L
DIABLO 1100	113	267	348	232	358	φ 75/ φ 90	φ 75/ φ 90	379	656	168	166	11.5
DIABLO 1500	113	267	348	232	358	φ 75/ φ 90	φ 75/ φ 90	379	656	168	166	11.5
DIABLO 2200	113	267	348	232	358	φ 75/ φ 90	φ 75/ φ 90	379	686	168	166	11.5
DIABLO 3000	113	267	348	232	358	φ 75/ φ 90	φ 75/ φ 90	379	708	168	166	11.5